

## Inspection Report

MODEL:GXP-355-30

SN:22040643.8

Date:20220806

### Optical Laser Parameters:

No	Test Item	Specification	Result
1	Average Power@800KHz,Burst 1	>30W	34.0W
2	Pulse Width(ps)	<15ps	9.38ps
3	Pulse repetition Rate Range(kHz)	500-2000	500-2000
4	Response rate	>95%	100%
5	Average Power Stability (over 8 hours)	<3%	0.20%
6	Beam Quality(M <sup>2</sup> )	<1.3	X=1.07,Y=1.07
7	Beam Divergence (mrad)	1.0±0.2	X=0.93,Y=0.89
8	Beam Diameter(mm)(@400mm before window)	2.0±0.2	X=1.92,Y=1.80
9	Beam Roundness	>90%	94.0%
10	Astigmatism	<0.1	0.01

### General Tests:

No	Item	Specification	Result
1	Operational Temperature Range (°C)	5 to 35	Pass
2	Warm/Cold Boot	<10min/30min	Pass
3	Flow Rate/Temperature	>5L/min@23°C	Pass
4	Communication Protocols	RS232	Pass
5	Pulse String Mode	---	Pass
6	PSO and Sync Mode	---	Pass

Tested by:WDY

Approved by:WDY

MODEL:GXP-355-30

SN:22040643.8

Date:20220806

**Amplifier:**

Diode 1 Current	8.0A	Diode 1 Temp	28.5°C
Diode 2 Current	9.0A	Diode 2 Temp	29.5°C
Diode 3 Current	13.0A	Diode 3 Temp	31.3°C
Diode 4 Current	13.0A	Diode 4 Temp	31.8°C
Diode 5 Current	14.0A	Diode 5 Temp	32.1°C
Crystal 1 Temp	50.1/53.0°C	Crystal 2 Temp	49.9/52.9°C

**Output Power VS Frequency & Burst Number :**

Frequency (KHZ)	Power for Burst=1 (W)
500	31.6
600	33.8
700	34.5
800	34.0
900	33.1
1000	32.0

**Output Power VS Power Set(Frequency=800K):**


Power Set (%)	Output Power (Burst=1) (W)
10	3.4
20	6.6
30	9.6
40	12.7
50	15.6
60	19.7
70	22.9
80	26.7
90	30.3
100	34.0

MODEL:GXP-355-30

SN:22040643.8

Date:20220806

Power: 扩束衰减 0W

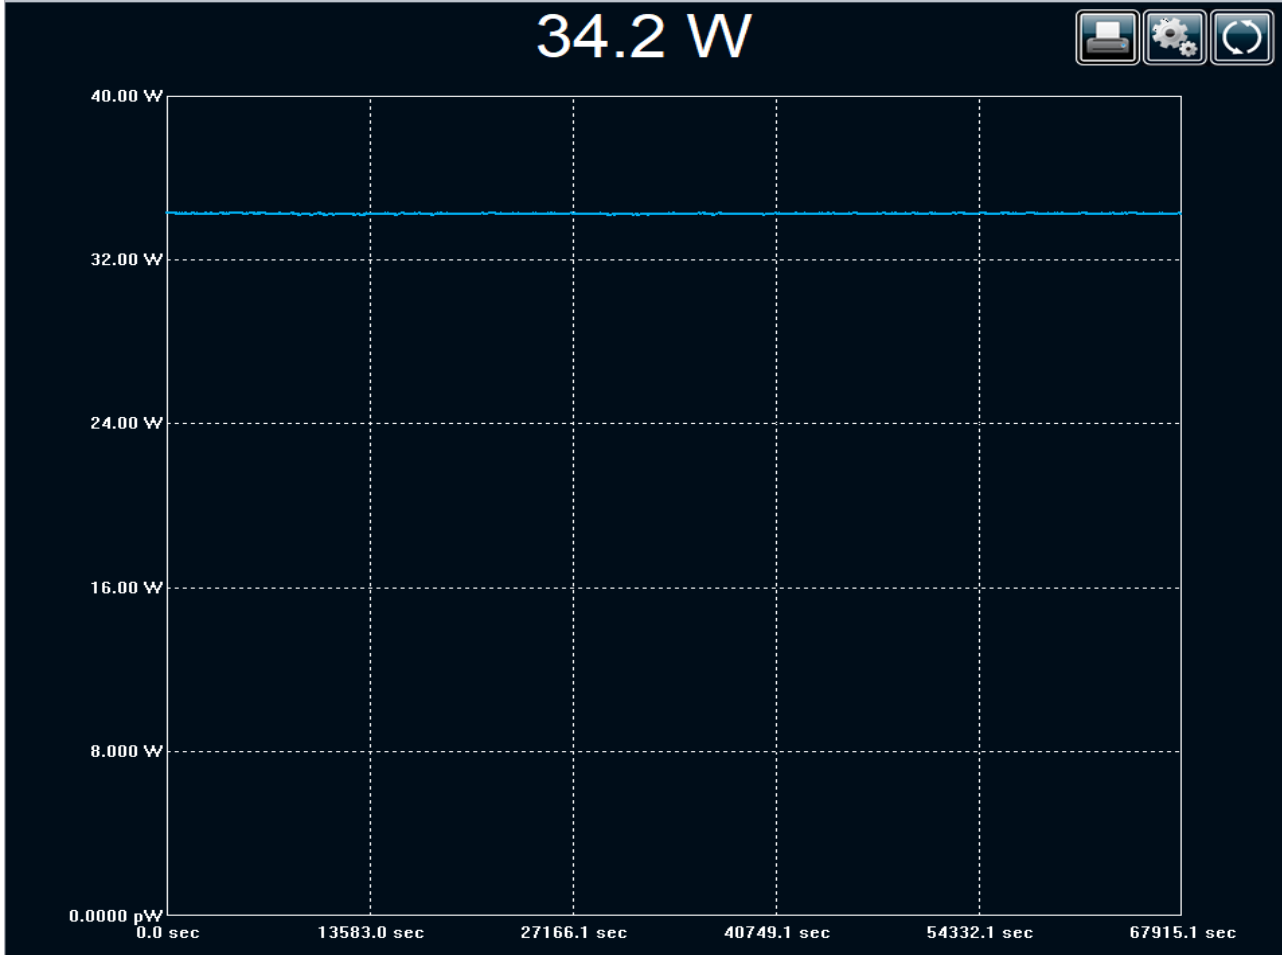

Beam@400mm before window:

